

Bộ đếm sét CDR-401 Cirprotec

# Cirprotec

## CDR-401

Lightning discharge counter

<http://chongset.org>



<http://BaoMinhTech.com> nhà phân phối thiết bị đếm sét Cpt Cirprotec **CDR-401** - Tây Ban Nha.

Liên hệ: 028 6297 2398 - 0917 650 109 - Email: [baominhtech@gmail.com](mailto:baominhtech@gmail.com) - website: <http://chongset.org>

**“Clip-on” installation around  
flat tape and cable conductors**

**CPT** cirprotec

# CDR-401 Bộ đếm sét CDR-401 Cirprotec

Lightning discharge counter

## The best features

### Standards

CDR-401 is the new counter which complies with the latest applicable Lightning Protection related Standards




### Easy and tight fastening

CDR-401 can be firmly attached to the conductor by means of internal rubber pads. Hence, the system can be firmly installed without even attaching it to the wall with screws



### Open core technology

CDR-401 is a "Clip-on" counter that can be installed around the conductor. Ideal also for retrofitting

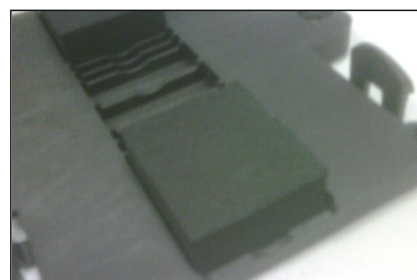

### Universal

CDR-401 can be used on both flat tape and round conductors



### Quality and image

CDR-401 is made of high quality materials and offers a renewed and sturdy design

### IP67

CDR-401 is totally protected against the effect of dust and against the effect of immersion



<http://BaominhTech.com> nhà phân phối thiết bị đếm sét Cpt Cirprotec **CDR-401** - Tây Ban Nha.

Liên hệ: 028 6297 2398 - 0917 650 109 - Email: [baominhtech@gmail.com](mailto:baominhtech@gmail.com) - website: <http://chongset.org>

**CPT** cirprotec



# CDR-401 Bộ đếm sét CDR-401 Cirprotec

Lightning discharge counter

## Clip-on installation

CDR-401 is a “clip-on” counter which can easily be installed on either flat tape or cable conductors.

It just needs to be **clipped around the conductor and it will remain tightly fastened**. The system can also be screwed to the wall, but this is optional as the CDR-401 is provided with internal rubber pads which allow for tight installation around the conductor.

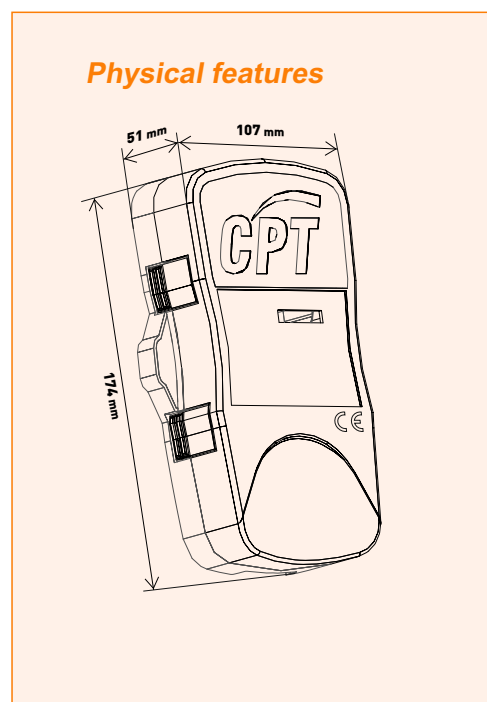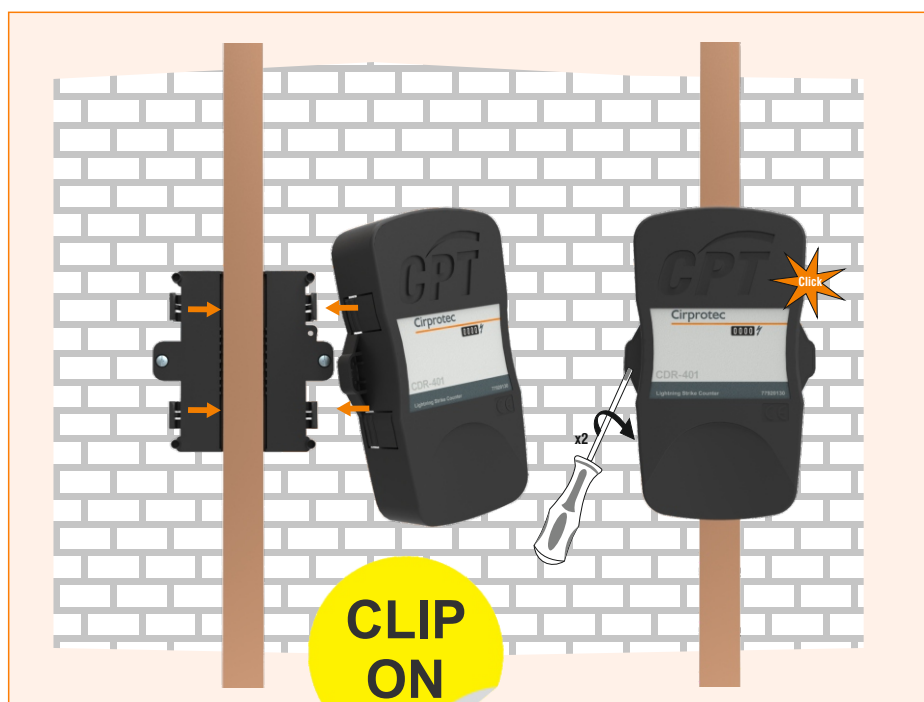

### Technical features

Modelos/Models Códigos/Codes		CDR-401 77920130
According to EN 50164-6		Yes
According to EN 62561-6		Yes
According to UTE C 17-106		Yes
Threshold current (8/20)	$I_{TC}$ [kA]	1
Maximum counting and withstand discharge current (10/350)	$I_{mcw}$ [kA]	100
Metering range		0...9999
Insulating material & flammability class		PC ; V-0 + UV
Color		RAL 9005
Enclosure		IP 67
Down-conductor system		Flat type (max. 30x6 mm), Cable (max. Ø10 mm)
Certifications		CE
Standards		EN 50164-6 / EN 62561-6 / UTE C 17106

#### CIRPROTEC, SL

Lepanto 49 · 08223 Terrassa (Barcelona) · SPAIN  
Telf. +34 93 733 16 84  
export@cirprotec.com  
www.cirprotec.com

<http://BaoMinhTech.com> nhà phân phối thiết bị đếm sét Cpt Cirprotec CDR-401 - Tây Ban Nha.

Liên hệ: 028 6297 2398 - 0917 650 109

